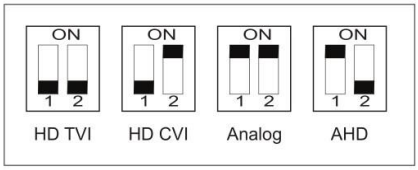

CPC100-ARDF

2.1 MP 1080P 4in1 IR Dome Camera

FEATURES

4-in-1 HDCVI / HDTVI/AHD / CVBS optional output

Full HD resolution 1920 x 1080P with CMOS sensor

Ultra low illumination 0.02Lux

Up to 300M long distance and high speed real time monitoring

OSD menu control up the coaxial cable (UTC)

Low light and high dynamic range

Day/Night (ICR), AWB, AGC, BLC, DNR, D-WDR, Smart IR

Lightning protection

Strong water-proof housing, IP66

8 pcs SMD Array IR Leds, IR distance 15-20 meters

3.6 mm lens

SPECIFICATIONS

Model	**CPC100-ARDF**
Camera	
Image Sensor	1/2.7" 2.1 Mega pixels CMOS
Effective Pixels	1936(H)×1096 (V)
Video Resolution	1080P@25/30fps
Electronic Shutter	AUTO, 1/25 - 1/50,000s
Min. Illumination	0.02Lux@F1.2(AGC ON), 0Lux IR on
Video System	PAL/NTSC
Video Output	1 channel, HDCVI / HDTVI/AHD/CVBS , adjustable
Video Switch	2 bit switch
Day/Night	Auto/Color/(B/W)/EXT
WDR	Digital WDR
White Balance	AWB/ATW/Indoor/Outdoor/Manual
AGC/BLC	Support
DNR	2D NR
OSD Menu	Multiple languages OSD menu control up the coaxial cable (UTC)
Other	
IR Led	
IR Led	8 pcs SMD Array IR Leds
IR Distance	15-20 M
Lens	
Focal length	3.6 mm fixed lens
General	
Power Supply	12 VDC ± 10%
Power Consumption	<5W
Operating Temp.	-20℃(+60) , 10℃ %-90%RH

DIMENSIONS

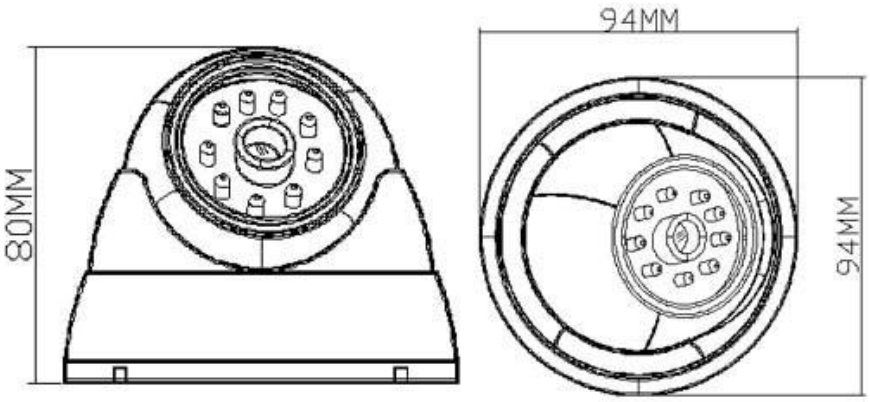
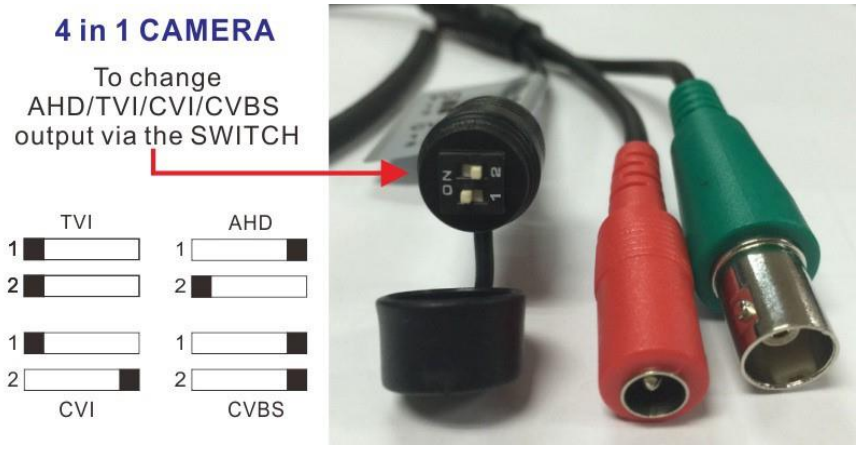
OPTIONAL BRACKET- BRACKET(HZ55)