

CPC102DV-1



2.1 MP 1080P HD TVI IR Vandal Proof Dome Camera 2.8~12mm


FEATURES

- 1/2.9" 2.1 Mega Pixels Sony CMOS sensor
- Full HD resolution 1920 x 1080P
- Ultra low illumination 0.017Lux
- Up to 500M long distance and real time monitoring
- OSD menu control up the coaxial cable (UTC)
- Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR
- WDR, Slow-Shutter, Smart IR, Sense up, Defog
- Motion Detection, Privacy Mask, Mirror
- Lightning protection
- Strong vandal-proof housing
- 30 pcs IR Leds, IR distance 15-20 meters, 2.8 – 12 mm VF Lens
- TVI & CVBS Video Output
(CVBS Output for Analog 960H)

SPECIFICATIONS

Model	CPC102DV-1
Image Sensor	1/2.9" 2.1 Mega pixels SONY CMOS
Effective Pixels	1984(H)×1105 (V)
Lowest illumination	0.01Lux@ (F1.2,AGC ON) , 0 Lux with IR
Electronic Shutter	AUTO, 1/30s~1/50,000s
Video Frame Rate	PAL/NTSC: 25/30fps@1920×1080P
Video Output	1 channel, HDTV 1920×1080P
Smart IR Control	Support
Day/Night	Auto / Color / B/W / Extend
WDR	D- WDR
SNR	>60 dB
Noise Reduction	2D/3D DNR
Sense Up	Support, ×30
Privacy Mask	Support 8 Zones
Defog	Support
OSD Menu	Support
Other Function	AWB, AGC, BLC, HLC , Mirror, Motion Detection
Power Supply	DC12V±10%
Power Consumption	< 5W
Working Environment	-30°C~+60°C / Less than 95%RH
IR LED	30 pcs φ5-850nm LED
IR Distance	15~20 meters
Lens	2.8-12mm VF lens
Transmission Distance	Up to 500m via 75-3 coaxial cable
Dimension	Φ149*125mm

DIMENSIONS

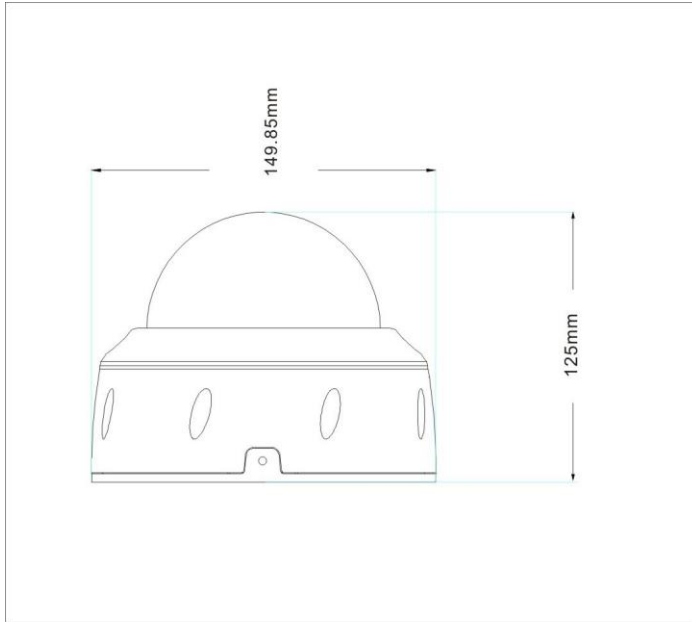

OPTIONAL BRACKET- BRACKET(102DV)

